

Electricity Report

13 to 19 October 2013



Introduction

The AER is required to publish the reasons for significant variations between forecast and actual price and is responsible for monitoring activity and behaviour in the National Electricity Market. The Electricity Report forms an important part of this work. The report contains information on significant price variations, movements in the contract market, together with analysis of spot market outcomes and rebidding behaviour. By monitoring activity in these markets, the AER is able to keep up to date with market conditions and identify compliance issues.

Spot market prices

Figure 1 shows the volume weighted average (VWA) prices for the current week (with prices shown in Table 1) and the preceding 12 weeks, as well as the VWA price over the previous 3 financial years.

Figure 1: Volume weighted average spot price by region (\$/MWh)

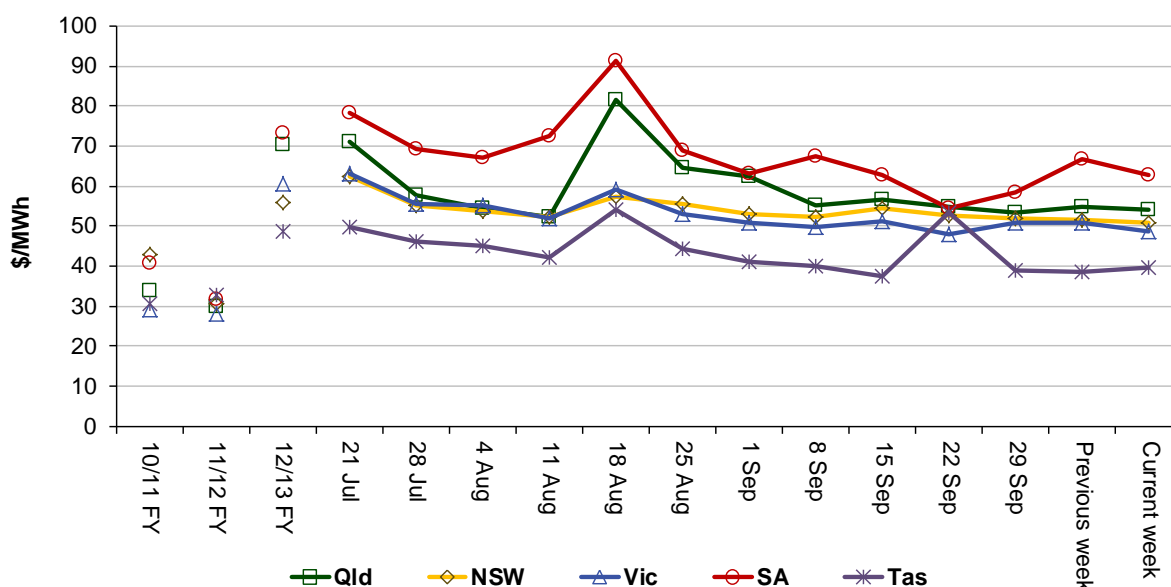


Table 1: Volume weighted average spot prices by region (\$/MWh)

Region	Qld	NSW	Vic	SA	Tas
Current week	54	51	49	63	40
12-13 financial YTD	57	60	61	65	49
13-14 financial YTD	59	55	54	69	46

Longer-term statistics tracking average spot market prices are available on the [AER website](http://www.aer.gov.au).

Spot market price forecast variations

The AER is required under the National Electricity Rules to determine whether there is a significant variation between the forecast spot price published by the Australian Energy Market Operator (AEMO) and the actual spot price and, if there is a variation, state why the AER considers the significant price variation occurred. It is not unusual for there to be significant variations as demand forecasts vary and participants react to changing market conditions. A key focus is whether the actual price differs significantly from the forecast price either four or 12 hours ahead. These timeframes have been chosen as indicative of the time frames within which different technology types may be able to commit (intermediate plant within four hours and slow start plant within 12 hours).

There were 87 trading intervals throughout the week where actual prices varied significantly from forecasts. This compares to the weekly average in 2012 of 60 counts and the average in 2011 of 78. Reasons for the variations for this week are summarised in Table 2. Based on AER analysis, the table summarises (as a percentage) the number of times when the actual price differs significantly from the forecast price four or 12 hours ahead and the major reason for that variation. The reasons are classified as availability (which means that there is a change in the total quantity or price offered for generation), demand forecast inaccuracy, changes to network capability or as a combination of factors (when there is not one dominant reason). An instance where both four and 12 hour ahead forecasts differ significantly from the actual price will be counted as two variations.

Table 2: Reasons for variations between forecast and actual prices

Reason for variation	Availability	Demand	Network	Combination
% of total above forecast	4	16	0	3
% of total below forecast	22	44	0	10

Note: Due to rounding, the total may not be exactly 100 per cent

Generation and bidding patterns

The AER reviews generator bidding as part of its market monitoring to better understand the drivers behind price variations. Figures 2 to 6 show, the total generation dispatched and the amounts of capacity offered within certain price bands for each 30 minute trading interval in each region.

Figure 2: Queensland generation and bidding patterns

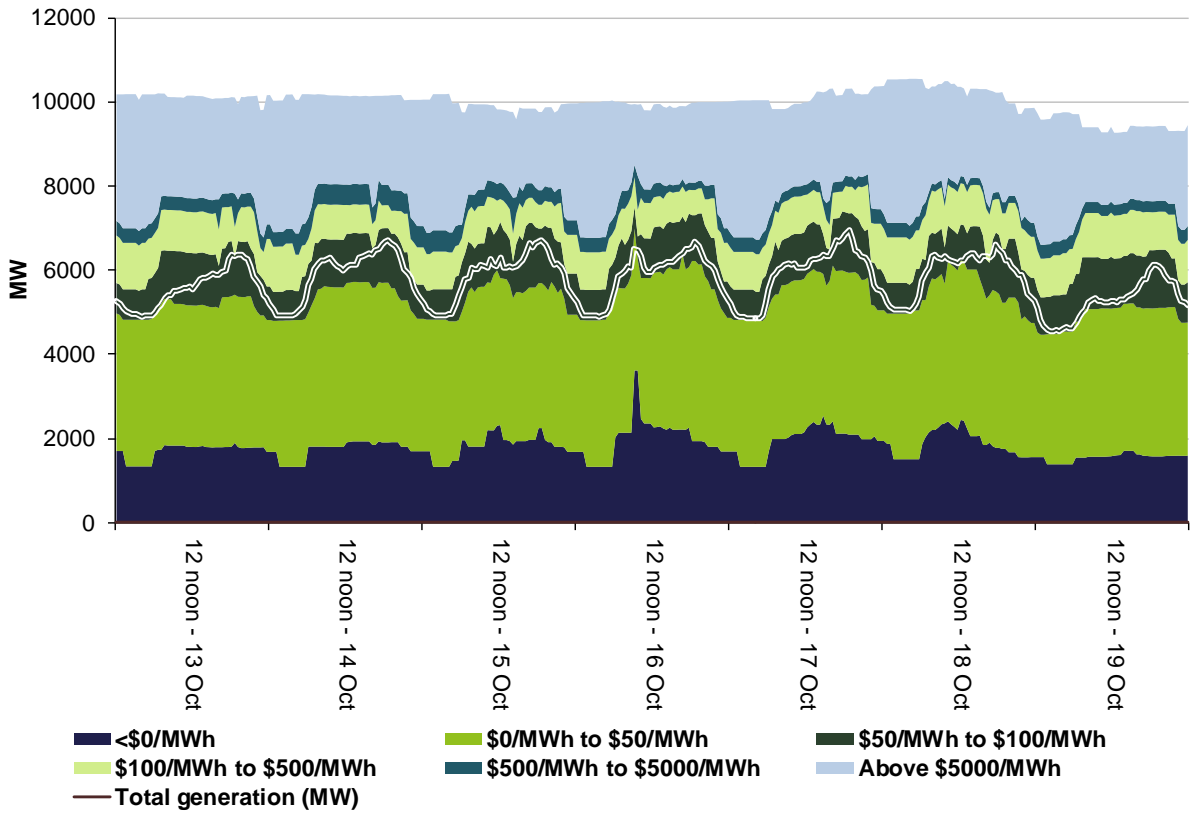


Figure 3: New South Wales generation and bidding patterns

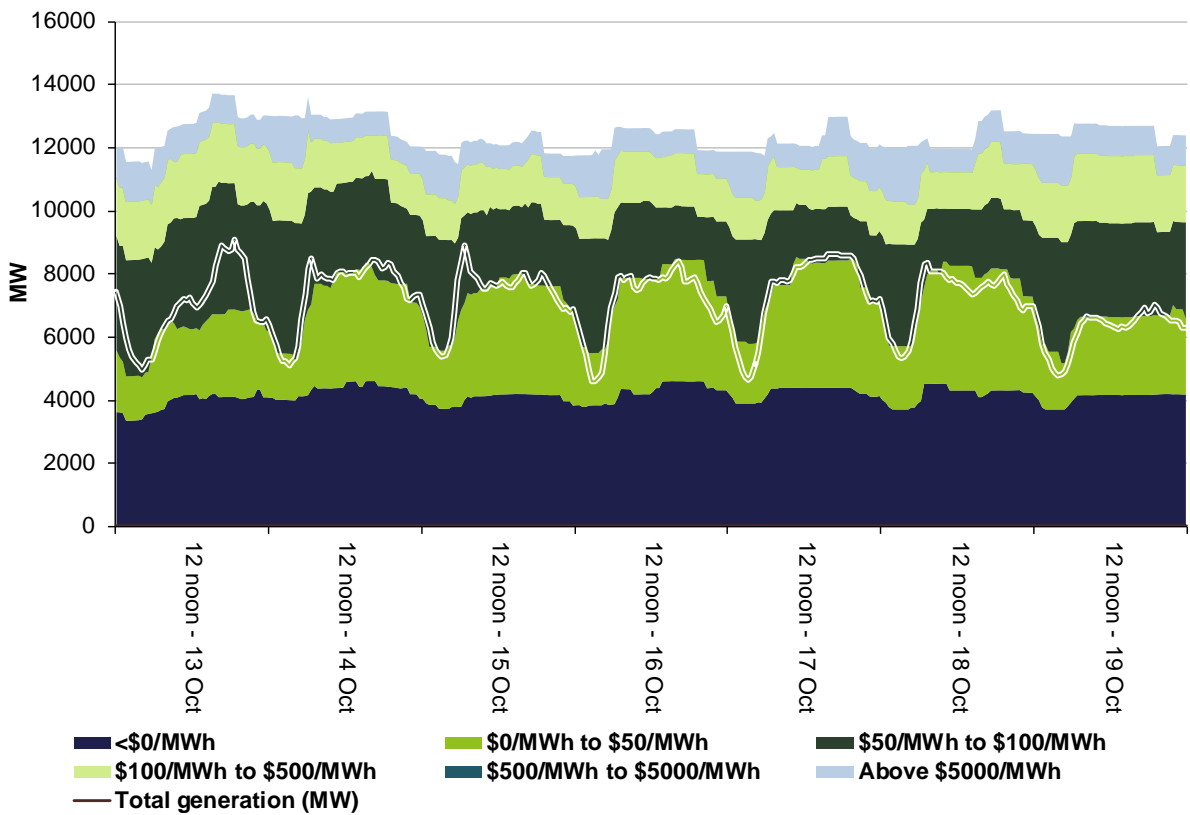


Figure 4: Victoria generation and bidding patterns

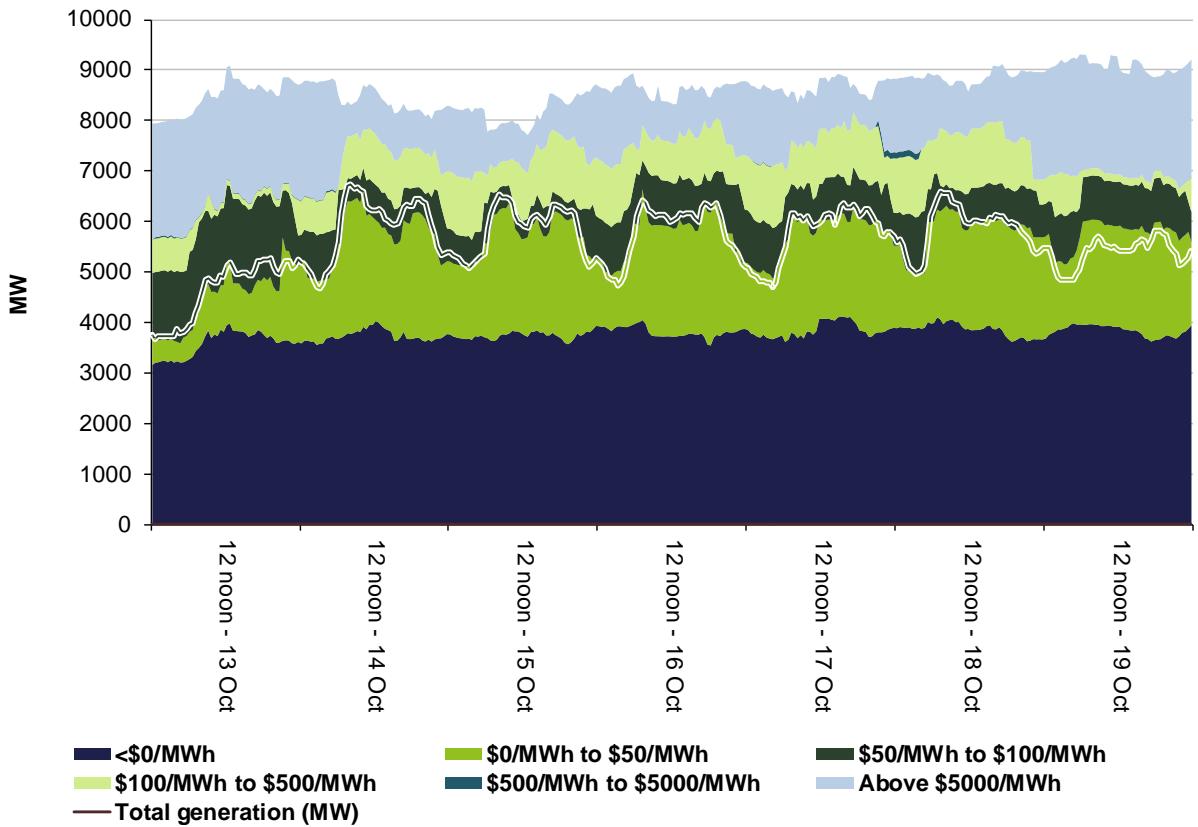


Figure 5: South Australia generation and bidding patterns


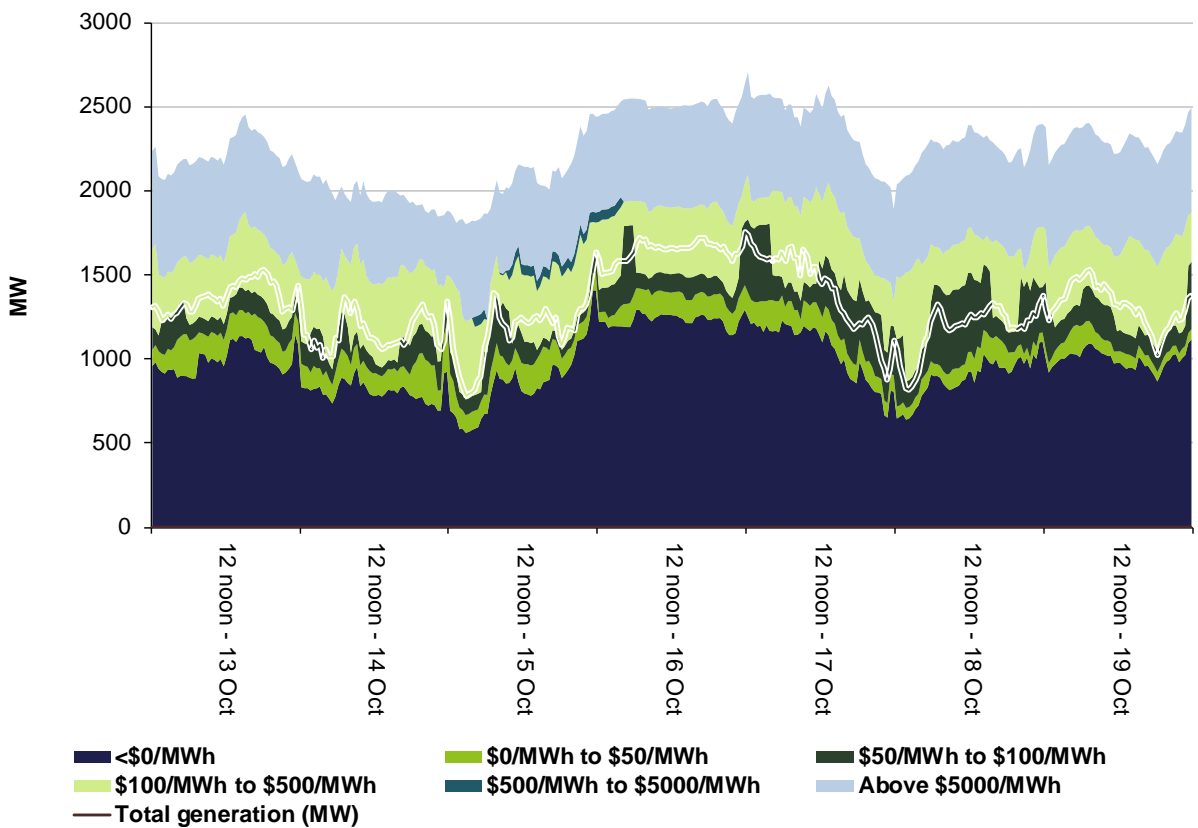


Figure 6: Tasmania generation and bidding patterns

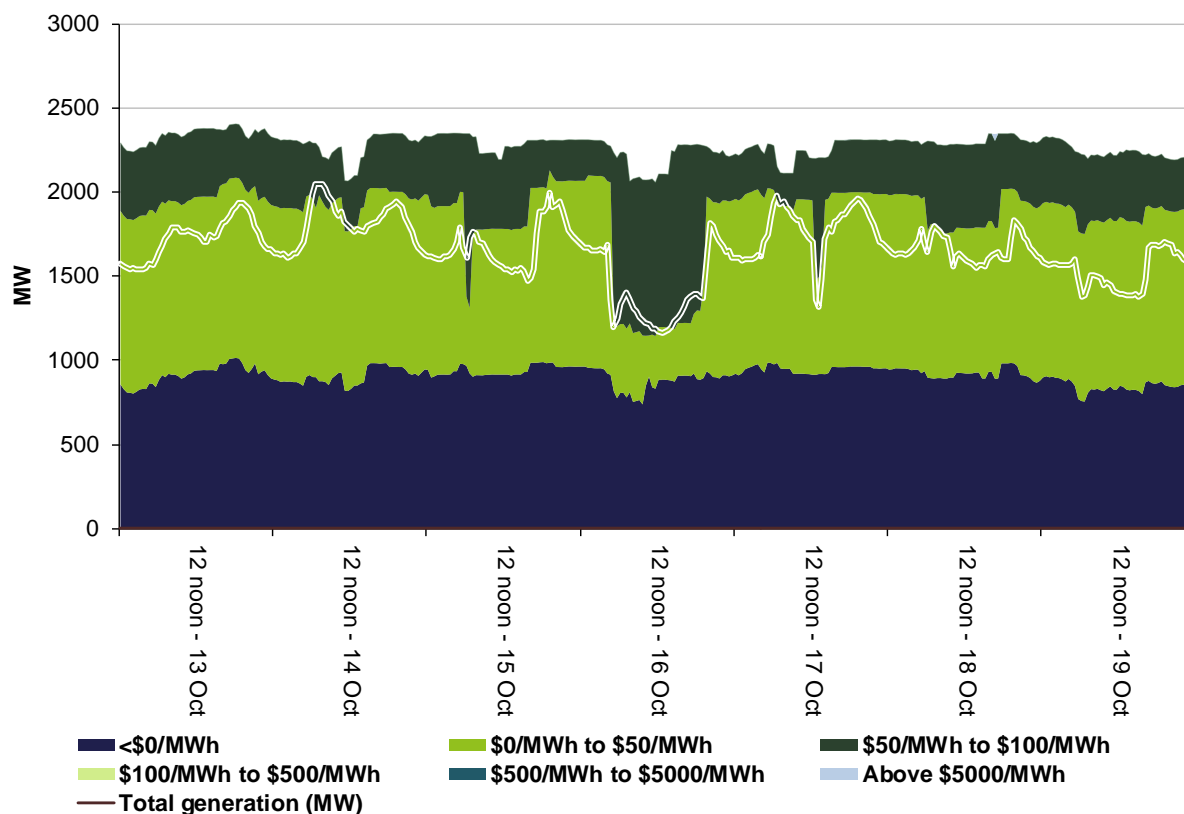

Frequency control ancillary services markets

Frequency control ancillary services (FCAS) are required to maintain the frequency of the power system within the frequency operating standards. Raise and lower regulation services are used to address small fluctuations in frequency, while raise and lower contingency services are used to address larger frequency deviations. There are six contingency services:


- *fast services*, which arrest a frequency deviation within the first 6 seconds of a contingent event (raise and lower 6 second)
- *slow services*, which stabilise frequency deviations within 60 seconds of the event (raise and lower 60 second)
- *delayed services*, which return the frequency to the normal operating band within 5 minutes (raise and lower 5 minute) at which time the five minute dispatch process will take effect.

The Electricity Rules stipulate that generators pay for raise contingency services and customers pay for lower contingency services. Regulation services are paid for on a “causer pays” basis determined every four weeks by AEMO.

The total cost of FCAS on the mainland for the week was \$254 500 or less than 1 per cent of energy turnover on the mainland. In Tasmania (which requires dedicated services for much of the time) the total cost for the week was \$77 500 or 1 per cent of energy turnover in Tasmania.

Figure 7 shows the daily breakdown of costs for each service, as well as the average daily costs for the previous financial year.

Figure 7: Daily frequency control ancillary service cost

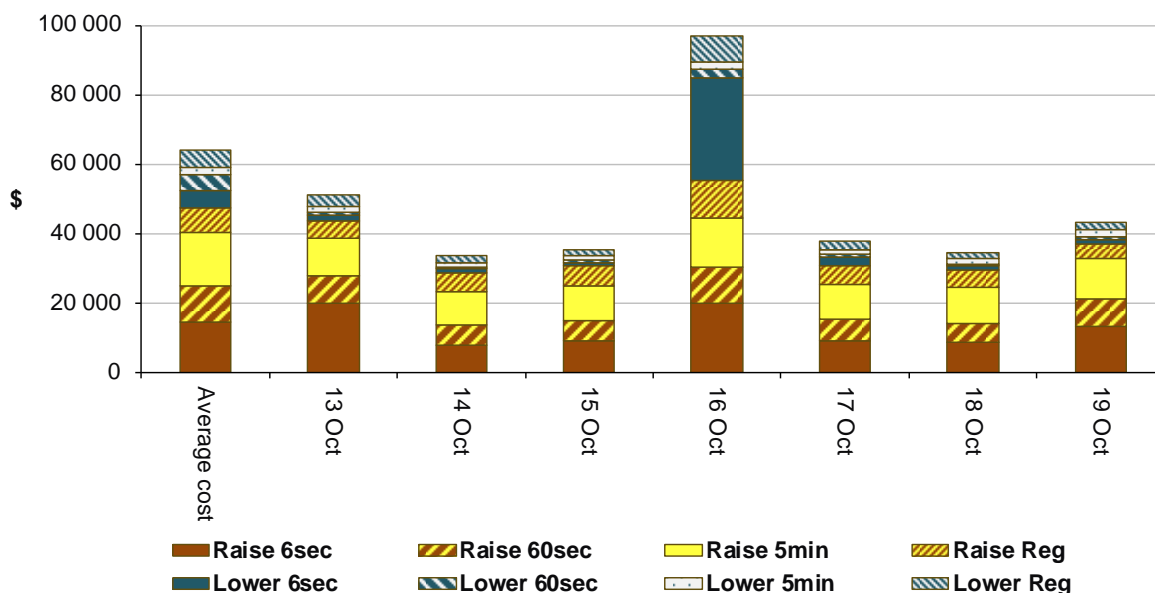

Detailed market analysis of significant price events

We provide more detailed analysis of events where the spot price was greater than three times the weekly average price in a region and above \$250/MWh or was below -\$100/MWh.

There was one such occasion this week, where the spot price in Queensland was greater than three times the Queensland weekly average price of \$54/MWh and above \$250/MWh.

Table 3: Queensland, Wednesday 13 October

7 PM	Actual	4 hr forecast	12 hr forecast
Price (\$/MWh)	302.96	65.00	65.00
Demand (MW)	6472	6442	6526
Available capacity (MW)	10 105	10 110	10 155

Demand and available capacity were close to forecast.

The Terranora interconnector was still unavailable (since 8 August) and voltage collapse constraints from the loss of the Kogan Creek Power Station limited QNI to around 260 MW.

At 6.45 am, effective from 6.55 pm, Stanwell rebid 589 MW of capacity across its portfolio from prices below \$600/MWh (a majority of which was priced below \$90/MWh) to \$1500/MWh and above. The reason given was “1842A P5 demand greater than P30 demand SL”. This resulted in the 5 minute price at 6.55 pm reaching \$1500/MWh set by Stanwell’s units.


Prices returned to previous levels at 7 pm when demand fell by 175 MW.

There was no other significant rebidding.

Financial markets

Figure 8 shows for all mainland regions the prices for base contracts (and total traded quantities for the week) for each quarter for the next four financial years.


Figure 8: Quarterly base future prices Q4 2013 – Q3 2017

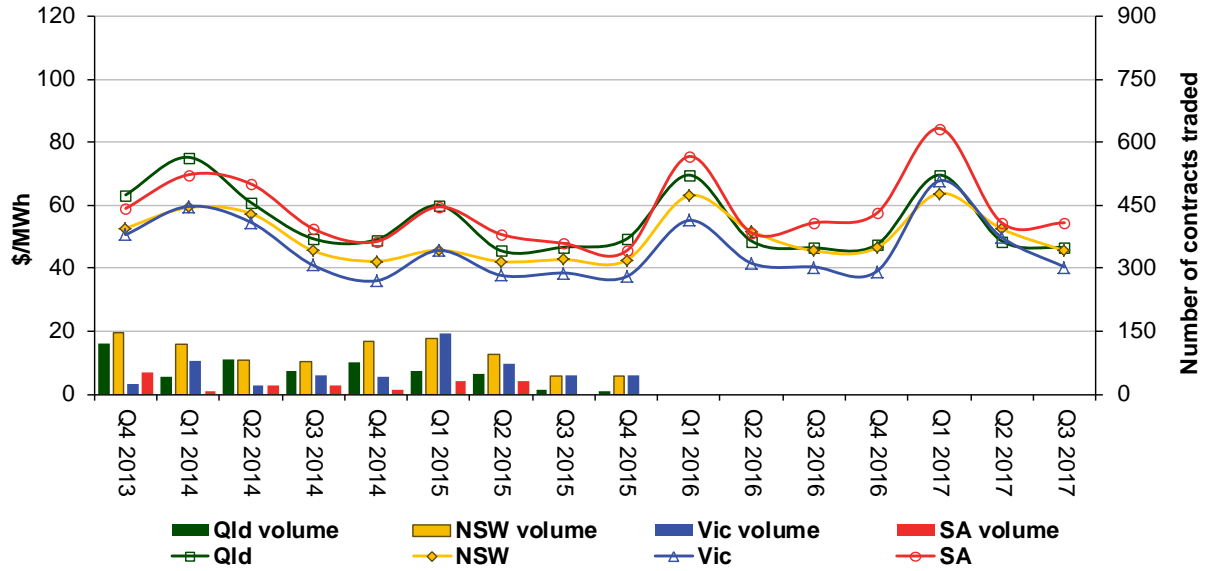

Source: ASXEnergy.com.au

Figure 9 shows how the price for each regional Quarter 1 2014 base contract has changed over the last 10 weeks (as well as the total number of trades each week). The closing Quarter 1 2012 and Quarter 1 2013 prices are also shown.

Figure 9: Price of Q1 2014 base contracts over the past 10 weeks (and the past 2 years)

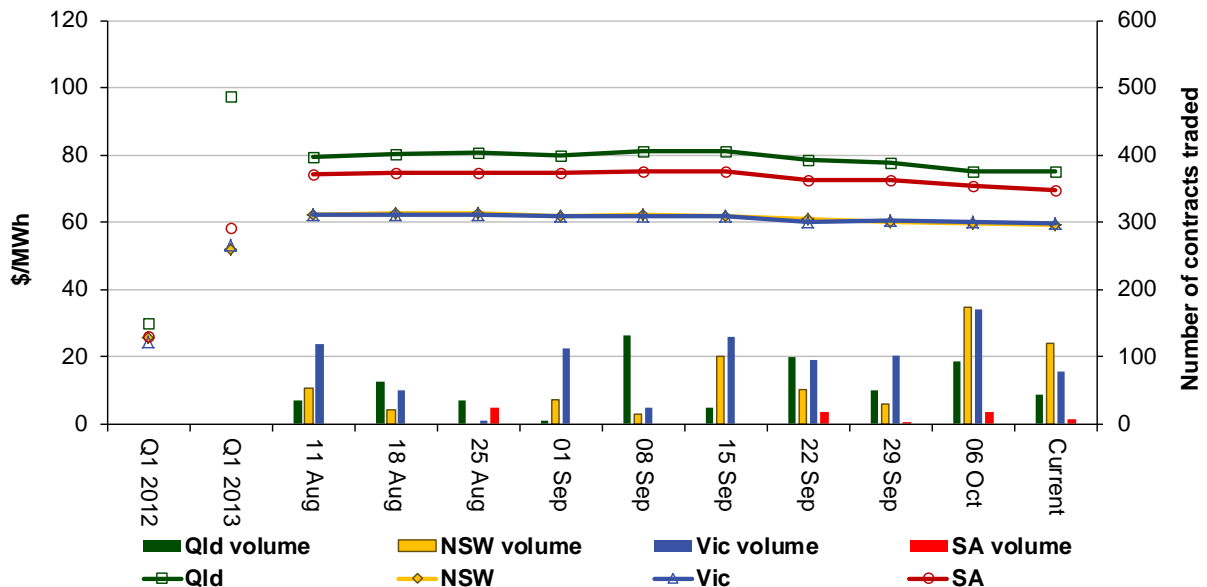


Note: Base contract prices are shown for each of the current week and the previous 9 weeks, with average prices shown for yearly periods 1 and 2 years prior to the current year

Source: ASXEnergy.com.au

Prices of other financial products (including longer-term price trends) are available in the [Industry Statistics](#) section of our website.

Figure 10 shows how the price for each regional Quarter 1 2014 cap contract has changed over the last 10 weeks (as well as the total number of trades each week). The closing Quarter 1 2012 and Quarter 1 2013 prices are also shown. The cap contracts limit exposure to extreme spot prices (above \$300/MWh) and is an indicator of the cost of risk management.

Figure 10: Price of Q1 2014 cap contracts over the past 10 weeks (and the past 2 years)

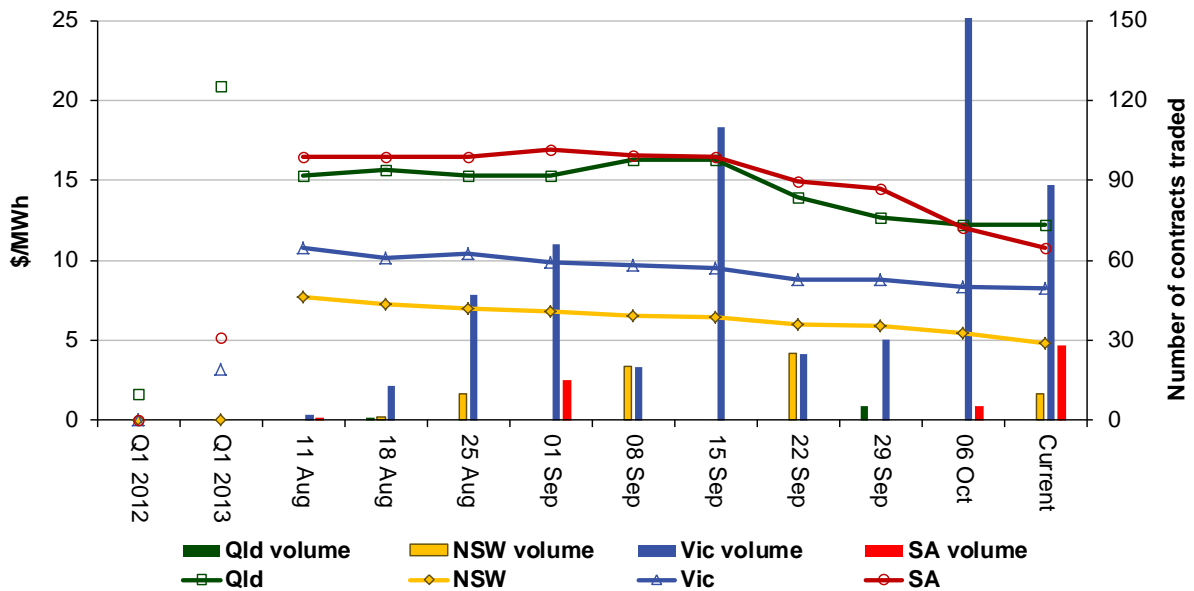

Source: ASXEnergy.com.au

Australian Energy Regulator
November 2013